

For Harsh Process

SDE-TX Series

Kashiyama
Vacuum Solutions



SDE Series Focused on Harsh Process Durability

01
FEATURE
Vertical Screw;
Durable against Deposit.

02
FEATURE
Material & Temp. setting;
Durable against Corrosion.*1



Harsh Process Application Example

Metal-Etch

SA-CVD

Metal-CVD

PE-CVD

LP-CVD


ALD

Major Products

Spec./ Products	SDE120TX	SDE303TX	SDE603TX	SDE1203TX	SDE20M12TX	SDE30M12TX
Max. pumping speed[L/min]*2	1,500	5,000	10,000	20,000	30,000	45,000
Ultimate pressure[Pa]*2	1.3	0.5				
Supply voltage(50/60Hz)	3Phase AC200 ~ 220V, 380 ~ 480V					
Dimensions[mm]W*H*L*3	370*501*690	400*905*760	400*905*760	400*905*900	460*960*900	500*960*1020

*1) Contact us about applicable gas. *2) Without N2 purge. *3) Package size. Dimensions vary by specification.
* Contact us about international standard compliance. Spec. & name of products are subject to change without prior notice.

S-P Curve

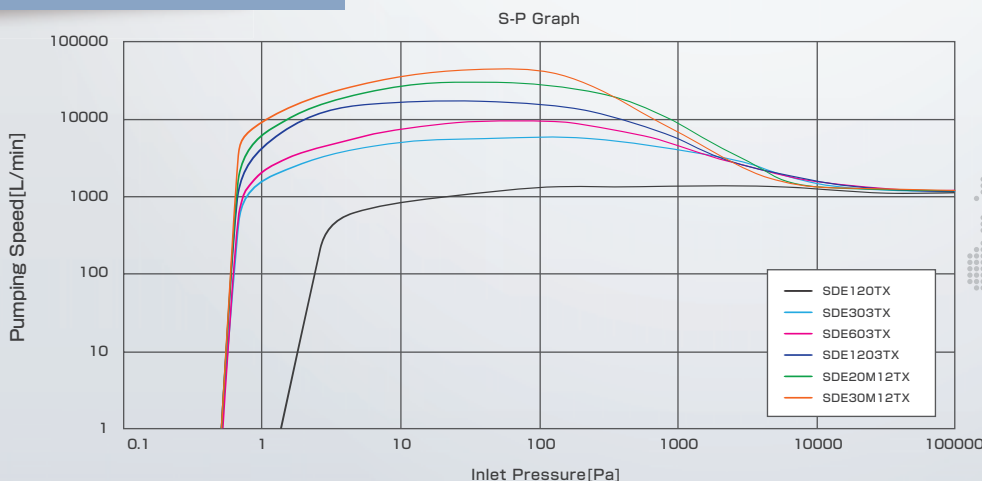

*S-P curves vary by combination.

Contact us

KASHIYAMA INDUSTRIES, LTD.

URL www.kashiyama.com

Japan
[Head Office] TEL +81-267-67-9009
FAX +81-267-67-9015
Email sales@kashiyama.co.jp

USA
TEL +1-510-979-0070
Email sales@kashiyama.com

Korea TEL +82-31-678-1500

China TEL +86-21-3895-4599

Taiwan TEL +886-4-2462-9599